



# TKB 25 SERIES

OPENABLE with DIVIDERS



|                  | A   | C   | KR              | P    | M/M   | PS-KG/M |
|------------------|-----|-----|-----------------|------|-------|---------|
| MODEL TKB 25/25  | 41  | 25  | 38-55-75-100    | 42,5 | 23,53 | 0,56    |
| MODEL TKB 25/38  | 54  | 38  | 125-150-200-250 | ...  | ...   | 0,62    |
| MODEL TKB 25/50  | 66  | 50  | ...             | ...  | ...   | 0,68    |
| MODEL TKB 25/57  | 73  | 57  | ...             | ...  | ...   | 0,74    |
| MODEL TKB 25/77  | 93  | 77  | ...             | ...  | ...   | 0,94    |
| MODEL TKB 25/103 | 119 | 103 | ...             | ...  | ...   | 1,14    |

|  |          |       |
|--|----------|-------|
| STROKE LENGTH  | SEE PAGE | 14    |
| CABLE CARRIER LENGTH                                 | SEE PAGE | 14    |
| SELF-BEARING LENGTH IN RELATION TO ADDITIONAL WEIGHT | SEE PAGE | 14-15 |
| NON-STANDARD or SPECIAL FLANGES                      | SEE PAGE | 11    |
| LOCKING ELEMENTS                                     | SEE PAGE | 12    |
| ASSEMBLY VARIANTS                                    | SEE PAGE | 9-10  |

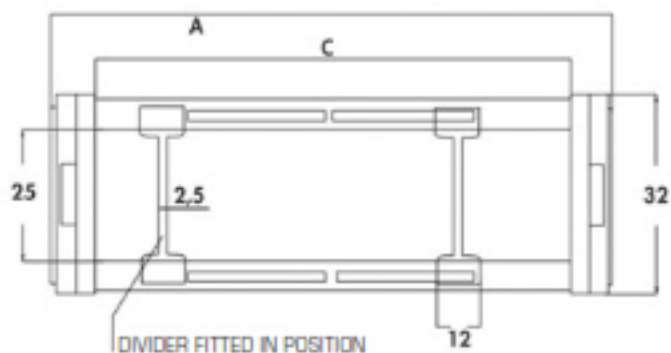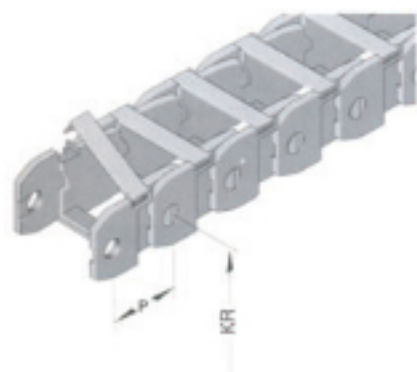

## CABLE CARRIER CROSS-SECTION

Cross-section view as per operation lay-out

### Openable series

Internal height D = 25 mm.